



Hi-Speed USB Device Cable

A Male / B Male, 4.5 m (15 ft.), Black

Model
337779


Connect with confidence.

MANHATTAN® Hi-Speed USB 2.0 Device Cables easily connect USB peripherals and accessories with desktop and notebook computers. Ideal for use with many USB external enclosures, hubs and other hot-swap, Plug and Play devices, MANHATTAN Hi-Speed USB 2.0 Device Cables support data transfer rates up to 480 Mbps on Windows and Mac systems for fast, reliable transmissions. Gold-plated contacts, shielding and fully molded boots with strain relief help provide dependable connections, maximum conductivity and minimal data loss with reduced EMI interference.

Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.



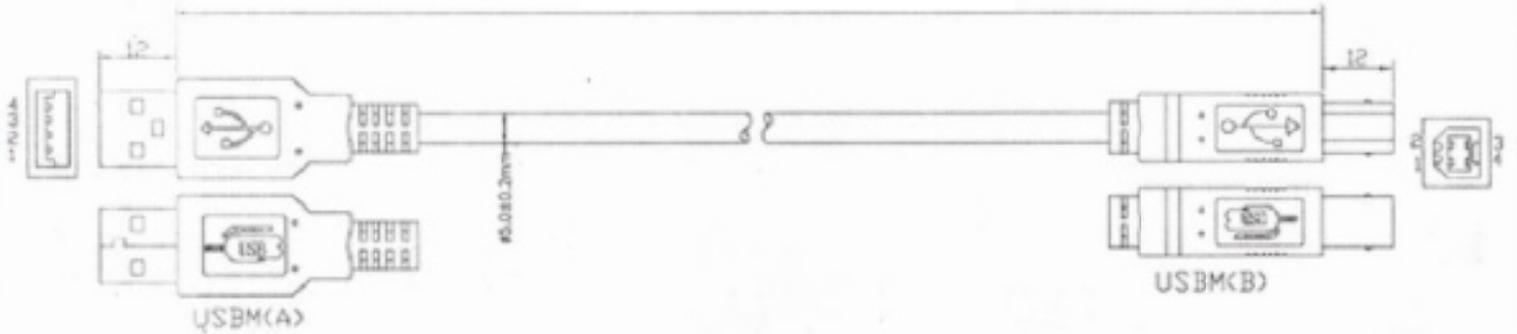

NOTE:

1. CABLE, UL2725, 2.0 AL+B-FOIL, 28AWG*1P+24AWG*2C, OD: 5.0MM, PVC JACKET
2. LENGTH: L
3. CONNECTOR: USB4PA(A)*1, USB4P(B)*1 (WHITE INSULATOR), ALIKE MOLDING
4. CONTACTS:
5. CONTACTS:



WHITE: GREEN...28AWG, RED: BLACK...24AWG

6. OPEN/SHORT TEST: 100% TEST. INSULATION: 2M.
7. COLOR CHART
 TRANSPARENT: Pantone 428C
 GRAY: Pantone Coolgray 7C
 RED: Pantone 1945C
 BLUE: Pantone 3015C
 BLACK: Pantone black 6C

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

TOLERANCE (INCH)		TOLERANCE (MM)	
Ø	+0.007	Ø	+0.18mm
Ø	+0.005	Ø	+0.13mm
Ø	+0.004	Ø	+0.10mm
Ø	+0.003	Ø	+0.08mm



TITLE: USB 2.0 CABLE		APP: Check		
CUSTOMER: Drawn		Date: 11/11/11		Revised: 11/11/11
CUSTOMER PIN:		Unit: mm	Projection: 2D	
SCT PIN:		Scale: 1:1	Size: A4	
DWG NO: ID#L 06-00-15-03		Sheet: 1 of 1	REV: A	

Features

- USB 2.0 Standard-A male to USB 2.0 Standard-B male
- Connects a Hi-Speed USB device to a Hi-Speed USB hub or computer
- Supports speeds of up to 480 Mbps
- Hi-Speed USB for ultra-fast data transfer rates with zero data degradation
- Lifetime Warranty

Specifications

STANDARDS AND CERTIFICATIONS

- UL 2725
- USB 2.0

- Contact resistance: 10 Ohms
- Thermal plastic casing

CONNECTORS

- (1) USB 2.0 Standard-A male
- (1) USB 2.0 Standard-B male
- Nickel plated
- Molded PVC boot

PACKAGE CONTENTS

- Hi-Speed USB Device Cable

CABLE

- 28 AWG conductors
- Shielded
- Withstanding voltage: 300 V DC 10 ms
- Insulation resistance: 5 MOhms

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

