



# High Speed HDMI Cable

## HDMI Male to HDMI Male, Shielded, Black

### High-speed cables deliver high-definition performance.

HDMI has become the standard digital connection, delivering the highest-quality audio and video signal over a single cable. MANHATTAN™ High Speed HDMI Cables are designed and carefully constructed to meet the evolving needs of the high-definition marketplace. MANHATTAN High Speed HDMI Shielded Cables provide the highest resolution possible at 4K x 2K, an audio return channel and a bandwidth of 10.2 Gigabits per second at 340 MHz. These high quality cables provide high-definition video and multi-channel, digital audio with increased performance characteristics, greater accuracy and expanded features. No matter if you need device cables, extension cables, or mini or micro connections, MANHATTAN has your High Speed HDMI Cables covered.

Model	Length
<b>308816</b>	1.0 m (3.3 ft.)
<b>306119</b>	1.8 m (6 ft.)
<b>306126</b>	3.0 m (10 ft.)
<b>306133</b>	5.0 m (16.5 ft.)


Model	Length
<b>308441</b>	7.5 m (25 ft.)
<b>322539</b>	10 m (33 ft.)
<b>308434</b>	15 m (50 ft.)
<b>308458</b>	22.5 m (75 ft.)

**Model**  
306119  
306126  
306133  
308434  
308441  
308458  
308816  
322539


### Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.



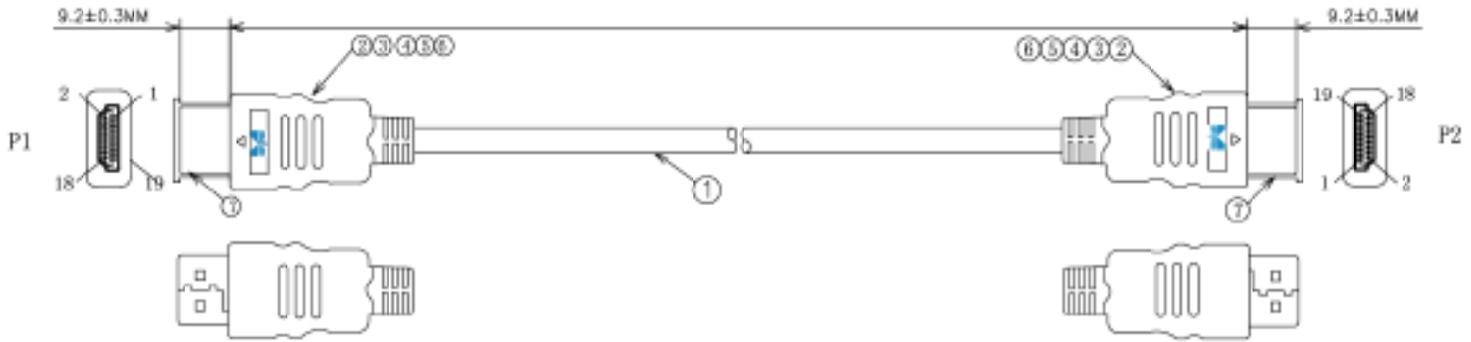

**ELECTRICAL TEST:**  
 1.100% OPEN & SHORT & MIS WIRE TEST  
 2.CONTACT RESISTANCE:2 OHM(MAX)  
 3.INSULATION RESISTANCE:10M OHM(MIN)  
 4.HI-POT TEST:DC 300V/10ms

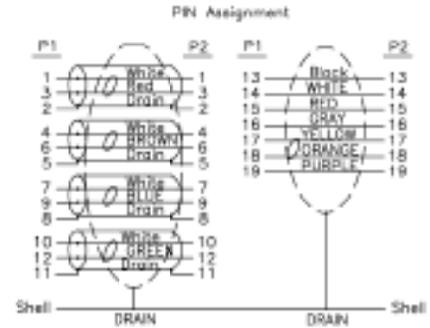

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

NO	CELINK P/N	DESCRIPTION	Q'TY	UNIT
7	A6-0000015	HDMI COVER TRANSPARENT		
6	A10-R075133	BLACK SHRINK TUBE #1.5*16MM	2	PCS
5	A10-R075130	BLACK SHRINK TUBE #2.5*10MM	8	PCS
4	A5-R047001	BLACK 45P PVC	16	G
3	A5-R047011	TRANSPARENT PE	3	G
2	A2-R020042	HDMI M 19P SOLDER TYPE BLACK INSULATION SHELL NICKEL PLATED	2	PCS
1	A4-R001504	LJL20276(28AWG*1PR+EAM)*4C+28AWG*1PR+28AWG*9C+AE8 OD:6.5MM BLACK JACKET(1.3b)	7.5	M

REV.	TOLERANCE	DESCRIPTION	DATE
	INCHES M/M	<b>MANHATTAN</b>	
⊕ ⊖	.X .XX .XXX	TITLE:	
	.015 .010 .005	CUSTOMER :	
		CUSTOMER P/N:	
		SCALE NONE	DRAWING NO:
		UNIT MM	REV A
		DATE 2008.10.31	1/2

## Features

- HDMI 19-pin male to HDMI 19-pin male connections
- Ensures the integrity of the signal between HDMI devices
- Supports HD resolutions beyond 1080p and Deep Color
- Compliant with High Speed HDMI specifications
- Up to 10.2 Gbps at 340 MHz bandwidth
- Fully shielded to reduce EMI and other interference sources
- Molded PVC boot
- Lifetime Warranty

## Specifications

### STANDARDS & CERTIFICATIONS

- UL 20276
- ISO 9002
- RU
- CE

### GENERAL

- Bandwidth: 10.2 Gbps
- 340 MHz
- Meets or exceeds existing HDMI standards
- Length: listed on Page 1

### CONTACTS

- 2 x HDMI 19-pin male
- Gold-plated contacts

- Molded PVC boot
- Shielded, aluminum and braided
- 28 AWG connectors

### ELECTRICAL

- Current rating: 0.5 A DC
- Withstanding voltage: 300 V DC
- Insulation resistance: 50 MOhms
- Conductive resistance: 2 Ohms
- Thermal plastic casing

### PACKAGE CONTENTS

- High Speed HDMI Cable

For more information on MANHATTAN products, consult your local dealer or visit [www.manhattan-products.com](http://www.manhattan-products.com).



Copyright © MANHATTAN

