

# **High Speed HDMI Cable**

HDMI Male to HDMI Male, Shielded, Black


## High-speed cables deliver high-definition performance.

HDMI has become the standard digital connection, delivering the highest-quality audio and video signal over a single cable. MANHATTAN™ High Speed HDMI Cables are designed and carefully constructed to meet the evolving needs of the high-definition marketplace. MANHATTAN High Speed HDMI Shielded Cables provide the highest resolution possible at 4K x 2K, an audio return channel and a bandwidth of 10.2 Gigabits per second at 340 MHz. These-high quality cables provide high-definition video and multi-channel, digital audio with increased performance characteristics, greater accuracy and expanded features. No matter if you need device cables, extension cables, or mini or micro connections, MANHATTAN has your High Speed HDMI Cables covered.

Model	Length	Model	Length
308816	1.0 m (3.3 ft.)	308441	7.5 m (25 ft.)
306119	1.8 m (6 ft.)	322539	10 m (33 ft.)
306126	3.0 m (10 ft.)	308434	15 m (50 ft.)
306133	5.0 m (16.5 ft.)	308458	22.5 m (75 ft.)


## **Lifetime Warranty**

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.





## **Technical Drawing**

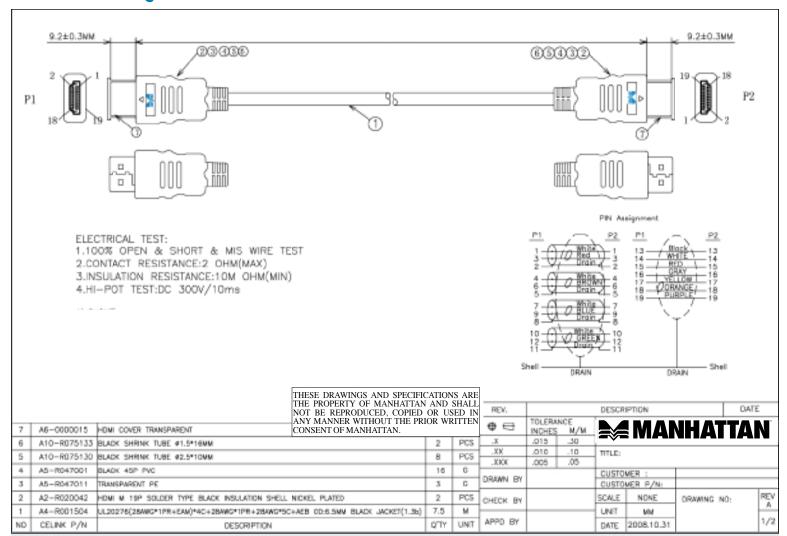

#### **Features**

- · HDMI 19-pin male to HDMI 19-pin male connections
- Ensures the integrity of the signal between HDMI devices
- Supports HD resolutions beyond 1080p and Deep Color
- Compliant with High Speed HDMI specifications
- Up to 10.2 Gbps at 340 MHz bandwidth
- Fully shielded to reduce EMI and other interference sources
- Molded PVC boot
- · Lifetime Warranty

## **Specifications**

#### **STANDARDS & CERTIFICATIONS**

- UL 20276 • ISO 9002
- RU
- CE

#### **GENERAL**

- Bandwidth: 10.2 Gbps
- Meets or exceeds existing HDMI standards . Thermal plastic casing
- · Length: listed on Page 1

#### **CONTACTS**

- 2 x HDMl 19-pin male
- Gold-plated contacts

- · Molded PVC boot · Shielded, aluminum and braided
- · 28 AW G connectors

#### **ELECTRICAL**

- Current rating: 0.5 A DC
- Withstanding voltage: 300 V DC
- Insulation resistance: 50 MO hms
- Conductive resistance: 2 0 hms

### **PACKAGE CONTENTS**

· High Speed HDMI Cable

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

