


Category 5e Solid UTP PVC Cable

Connectix Cat 5e UTP PVC Cable is designed for high speed LANs including Gigabit Ethernet applications. When used with Connectix panels and modules it gives the exceptional performance required for transmission over all four pairs. The cable is supplied in easy to use boxes and is available with standard grey PVC outer sheaths.


Features & Benefits

- Suitable for Gigabit Ethernet applications
- PVC outer sheaths
- Supplied metre marked in easy pull boxes for easy installation
- Pure copper cores
- Excellent performance exceeding ANSI/TIA state specifications
- 25 Year System Warranty Available
- Available in 100m and 305m boxes

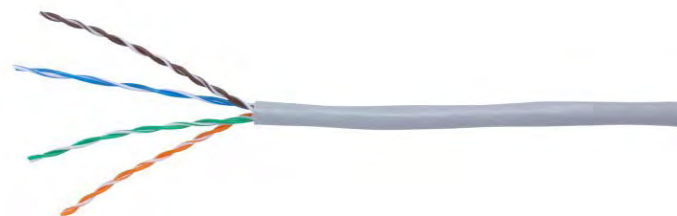

Product Specifications	
DC Resistance	< 9.4 Ω/100 m
Insulation Resistance	>5000mΩ*km
Capacitance Unbalance (pair to ground)	< 5.6nF/100 m
Velocity Ratio (NVP)	69%
Operating Temperature Range	-20°C to +70°C
Installation Temperature Range	0°C to +50°C
Characteristic Impedance @1-250 MHz	100 Ohm +/- 15 Ohm

Product Specifications	
Inner Conductor	24 AWG plain copper
Insulation	High density polyethylene
Construction	4 twisted pairs cabled together
Colour Code	Pair 1: White/Blue-Blue/White Pair 2: White/Orange-Orange/White Pair 3: White/Green-Green/White Pair 4: White/Brown-Brown/White
Sheath	PVC
RAL Colour	Grey - 7044
Overall Diameter	5.0 +/- 0.2 mm
Weight (Kg/Km)	39.1 (PVC/PE)/41.2 (LSZH)
Min. Bending Radius Installation	20 mm
Impedance	31
Conforms To	ANSI/TIA-568-C, ISO 11801 CENELEC EN 50173
Euroclass Rating	Eca

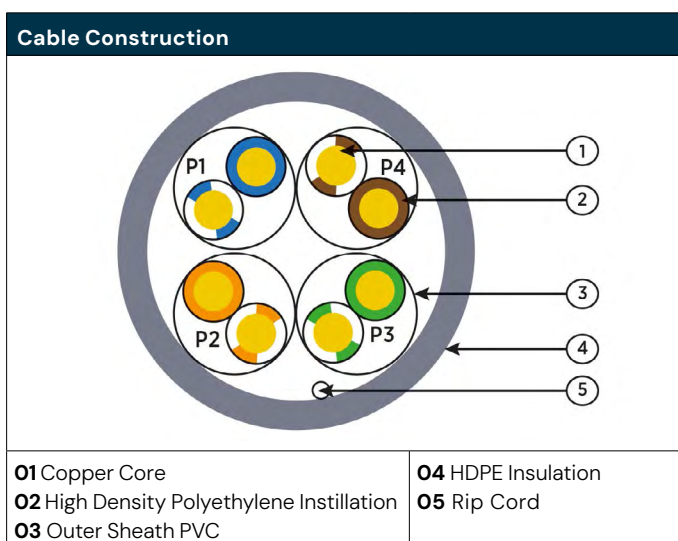

Ordering Information	
Product Description	Part Number
Cat 5e UTP PVC Solid Cable 100m Box	001-003-004-84
Cat 5e UTP PVC Solid Cable 305m Box	001-003-003-62S