


# 11.5kW 3-Phase Metered PDU, 240-220V (36-C13 & 9-C19), IEC-309 16A Red, 415-380V Input, 6ft Cord, 0U Vertical

MODEL NUMBER: PDU3XMV6G20

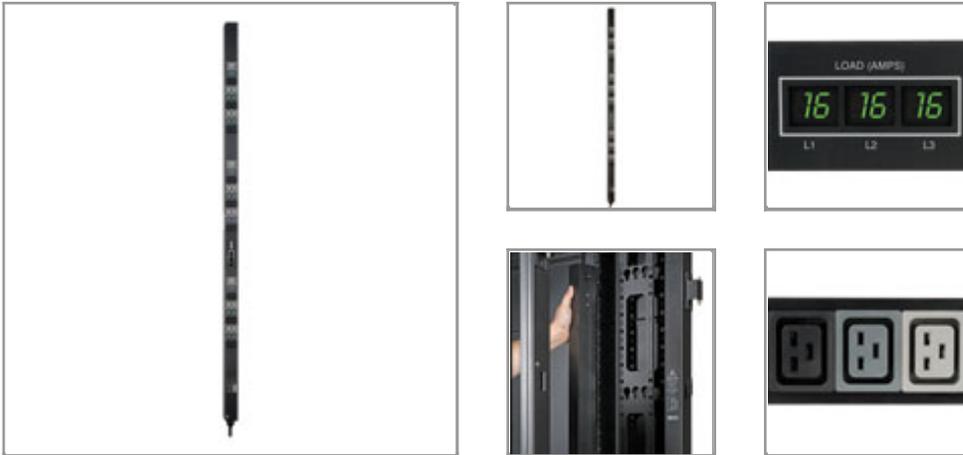

## Description

Tripp Lite 3 phase Metered PDU / Power Distribution Units offer real-time local reporting of current levels in amps via set of 3 built-in digital meters. Enables visual monitoring of PDU current levels to preserve proper loading balance and prevent circuit overloads as additional equipment is added. Offers reliable rackmount multi-outlet power distribution from any protected UPS, generator or mains input power source. High quality design includes rugged all-metal housing and secure rackmount installation with included mounting accessories.

## Features

- 11.5kW Metered Power Distribution Unit (PDU)
- 415/400/380V IEC-309 Red 16A (3P+N+E) 3-phase input connection
- 240/230/220V output with 36 C13 & 9 C19 single phase output receptacles
- Supports 50/60Hz worldwide applications with CE and North American certifications
- 0U / 1778mm vertical rackmount installation supported
- Outlets are arranged in 3 metered 15 outlet load banks
- Included cord retention brackets keep vital network equipment plugged in and continuously powered
- Toolless mounting supported in button-mount compatible racks, plus nut-and-bolt mounting brackets for other mounting applications (set of 2 9mm buttons pre-installed, 2 9mm and 4 6mm spare buttons included) for other mounting applications
- TAA Compliant Version Available - Order Tripp Lite PDU3XMV6G20TAA

## Highlights

- Metered 11.5kW 3 Phase 415/240V, 400/230V, 380/220V input / output PDU
- Set of 3 digital meters reports output load level per phase in amps
- 70in / 1778mm 0U vertical format, toolless button-mount installation
- IEC-309 Red 16A (3P+N+E) 3 phase input; 6ft 1.8m line cord
- 36 C13 & 9 C19 single phase outlets; Included cord retention brackets

## Applications

Ideal for 3 phase network configurations in datacenters and heavily configured equipment racks

## Package Includes

- Metered rackmount PDU with pre-installed mounting buttons
- Cord retention brackets
- Spare installation buttons (2 9mm / 4 6mm)
- Rack mounting brackets
- Owner's manual

## Specifications

OVERVIEW	
Style	Vertical rackmount



PDU Type	Metered
<b>OUTPUT</b>	
Output Capacity Details	11.5kW (415/240V), 11kW (400/230V), 10.5kW (380/220V) total capacity; 16A maximum per output phase
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(36) C13; (9) C19
Output Nominal Voltage	Single phase 240V (415V), 230V (400V), 220V (380V)
Outlet Type	IEC-C13, IEC-C19
<b>INPUT</b>	
PDU Input Voltage	380; 400; 415
Maximum Input Amps	16
PDU Plug Type	IEC-309 16/20A RED (3P+N+E)
Input Cord Length (ft.)	6
Input Cord Length (m)	1.8
Input Phase	3-Phase
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	6.1 x 4.3 x 75.8
Shipping Dimensions (hwd / cm)	15.5 x 10.9 x 192.5
Shipping Weight (lbs.)	13.8
Shipping Weight (kg)	6.2
Unit Dimensions (hwd / in.)	70 x 2.2 x 1.93
Unit Dimensions (hwd / cm)	177.8 x 5.6 x 4.9
Unit Weight (lbs.)	9
Unit Weight (kg)	4.1
Material of Construction	Steel
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
<b>ENVIRONMENTAL</b>	
Relative Humidity	0-95% non-condensing
<b>CERTIFICATIONS</b>	
TAA Compliant Option	TAA Compliant Version Available - Order Tripp Lite PDU3XMV6G20TAA
Certifications	Tested to UL (USA), CSA (Canada), NOM (Mexico), CE (EU), Class A (Emissions), RoHS (Hazardous Substances)



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2015 Tripp Lite. All rights reserved. All trademarks are the sole property of their respective owners. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos may differ slightly from final products.