

A Solid Power Protection from the Inside Out

The Value Series UPS with GreenPower UPST™ Technology offers home and small office users clean and stable battery backup while the featured RJ11/RJ45 port ensures phone, fax, and modem lines are protected from surges. With Automatic Voltage Regulator (AVR) stabilizes the AC signal and maintains a safe voltage, this allows the UPS to maintain safe power levels for the connected equipment without resorting to battery power. The multifunction LCD readout provides immediate access to precise information of critical power/battery condition.



The included PowerPanel® Personal Edition management software showcases the feature-rich abilities such as input/output power voltage readings, self-diagnostics, and approximate battery backup time. With the Energy-Saving Technology, the Value Series UPS could improve the operating efficiency and eliminate the waste energy consumption.

Applications

- Home and Home Office
- Home Theater System
- Small Office
- Medium Business

Series Features

- GreenPower UPST™ Technology
- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- Auto-Restart/Auto-Charge
- LCD Status Monitor
- USB & Serial Connectivity Ports
- User-Replaceable Batteries
- PowerPanel® Personal Edition Software

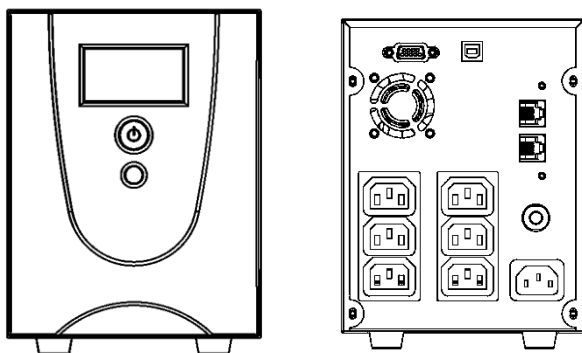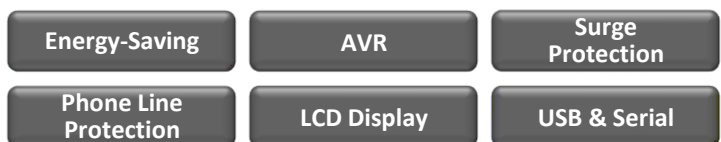

Front

Back



ENERGY-SAVING TECHNOLOGY
The patented advanced energy-saving technology improves the operating efficiency and eliminates waste energy consumption.

PowerPanel® Personal Edition Management S/W

AUTO-SHUTDOWN SOFTWARE

CyberPower PowerPanel® Personal Edition Management Software, is compatible with Windows7, Vista, XP, 2000 Pro., ME, 98, Windows Server 2008, 2003, Mac and Linux.


**Software functions may vary due to firmware version and/or hardware constraints.*

Technical Specification

Model	Value1200EILCD	Value1500EILCD	Value2200EILCD
Capacity (VA / Watts)	1200 / 720	1500 / 900	2200 / 1320
Energy-Saving Technology	Yes		
Input			
Frequency Range	47 - 63 Hz (Auto Sensing)		
Input Plug Type	IEC 320 C14		
Output			
UPS Outlets (Numbers)	(6) IEC 320 C13		
On Battery Output Voltage (Typical)	Simulated Sine Wave at 230Vac +/- 7%		
On Battery Output Frequency	50Hz/60Hz +/- 1%		
Transfer Time (Typical)	4ms		
Overload Protection	On Utility: Circuit Breaker & Internal Current Limiting On Battery: Internal Current Limiting		
AVR	Boost & Buck		
Surge Protection and Filtering			
Surge Protection	Yes		
Physical			
Dimensions (HxWxD) (mm)	180 x 140 x 326		
Weight(kg)	11.2	13.2	14.5
Battery			
Sealed Maintenance Free Lead Acid Battery	12V / 7AH x 2	12V / 8.5AH x 2	12V / 9AH x 2
Typical Recharge Time	8 Hours		
Runtimes			
Half-load / Full-Load (mins)	10 / 3	11 / 3	8 / 2
Status Indicators			
Indicators	Power On, Using Battery		
Audible Alarms	On Battery, Low Battery, Overload		
Multi-function LCD Readout	Yes		
Communication			
PowerPanel® Personal Edition	Windows 7 / Vista / XP / 2000, Server 2003 / 2008, Linux		
	Compatible with Mac Power manager		
Management			
Self Test	Yes		
Auto-Charge / Auto-Restart	Yes		
Connectivity Ports	USB, Serial		

#All specifications are subject to change without notice. ©2012 CyberPower Systems. All Trademarks are the property of their owners.

Packaging Content:

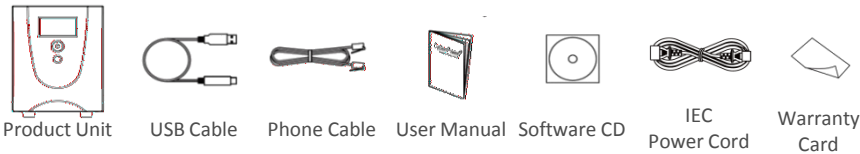

DISTRIBUTED BY:

CyberPower's
Manufacturing
Facilities are
ISO 9001:2000,
ISO 14000, and
QC080000
Approved