



Day/Night : See up to 15-feet in the dark



Wireless N for flexible placement



Remote Viewing: View on iPhone®, iPad® or Android® with mydlink™ app



Record Video: microSD/SDHC card slot & video compression



Motion Detection: Trigger recording and send email alerts

Cloud Camera 2200

HD Day/Night Network Camera

Product Highlights

HD Image Quality and Detail

A high resolution megapixel sensor provides 720p HD resolution to ensure that you capture the details you need

All-Day Surveillance

A built-in ICR filter and IR illuminator let you monitor an area 24 hours a day, even in complete darkness

mydlink-enabled Cloud Access

Easy remote viewing and management of your camera on your mobile device or through the mydlink website

HD Day/Night Network Camera

The D-Link Cloud Camera 2200 (DCS-2132L) is an HD Day/Night Network Camera with Cloud Services. Monitor and protect your home or business – anytime, anywhere – with the confidence of 720p HD clarity.

720p HD for Superior Image Quality

The Cloud Camera 2200 delivers the confidence of 720p HD video clarity, ensuring rich detail and crisp image quality for your surveillance recording. And with integrated night-vision and PIR motion-sensing technology, the Cloud Camera 2200 remains vigilant 24 hours a day, whether you're there or not.

Industry-Leading Remote Viewing with mydlink

With the free mydlink Lite app, you can monitor your home or business on your iPhone², iPad² or Android² device and experience the peace of mind that comes from having round-the-clock surveillance at your fingertips. Check in on your home while you're at work, or monitor your business when you're out of the office – with mydlink, you can keep an eye on what matters, whenever and wherever you want.

DCS-2132L

Package Contents

- Cloud Camera 2200 (DCS-2132L)
- Ethernet Cable
- Power Adapter
- Quick Install Guide

Minimum System Requirements

Wired (10/100 Fast Ethernet) or Wireless (802.11g or 802.11n) Network (Wireless N network recommended for optimum wireless performance)

Computer with:

- 1.3GHz Processor
- 128MB Memory
- Windows® 7⁵, Windows Vista®⁵ and Windows® XP SP2⁵, or Mac OS X (10.5 and above, Intel Processor)
- Internet Explorer® v6, Mozilla® Firefox® v3.0, Google® Chrome v2, or Safari® v4

For Internet Access:

- Cable or DSL Modem
- Subscription with an Internet Service Provider (ISP)

Features

- mydlink.com Portal for Remote Camera Management
- 1/4" Megapixel CMOS progressive sensor
- Fixed lens: 3.45 mm F2.0
- Passive infrared (PIR) sensor for enhanced motion detection
- Built-in infrared-cut removable (ICR) filter for all day surveillance
- Built-in IR LED illuminator for use in dark areas
- Built-in microphone and speaker for 2-way communication
- ONVIF compliant
- 802.11n wireless connectivity⁸
- 10/100 Fast Ethernet port
- Micro SD/SDHC Card slot for onboard storage
- DI/DO port for connection to external devices
- HD resolution (1280 x 720) and up to 1MP (1280 x 800)
- H.264, MPEG-4 and Motion JPEG compression
- ePTZ viewing
- Simultaneous multi-stream support
- Privacy Mask feature
- Supports multiple access lists
- Built-in Samba client for saving to a NAS
- 24/7 Basic Installation Support³
- 1-Year Limited Warranty⁴

Make Easy Setup Even Easier – With Zero Configuration

Connecting your D-Link camera with any router is easy – make it even easier with your D-Link Cloud Router. Zero Configuration automatically configures and intelligently syncs your D-Link camera to your mydlink account – it's as easy as connect and view!

Easy Installation, Professional Performance, Anywhere Access





Surveillance

Small Business

Loved Ones

Garage

Home

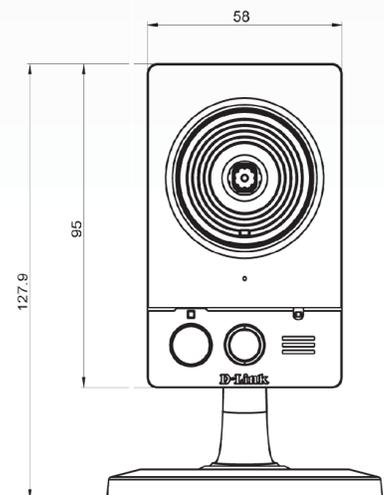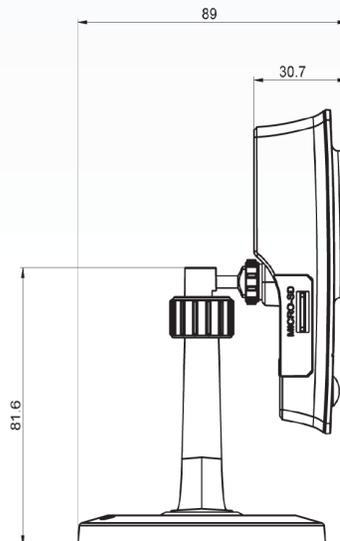

Technical Specifications		
Camera		
Hardware Profile	<ul style="list-style-type: none"> • 1/4" Megapixel progressive CMOS sensor • 5 meter IR illumination distance • Minimum illumination: 0 lux with IR LED on • Built-in Infrared-Cut Removable (ICR) Filter module • Built-in PIR sensor (5 meter) 	<ul style="list-style-type: none"> • Built-in microphone and speaker • 10x digital zoom • Focal length: 3.45 mm • Aperture: F2.0
Field of View	• (H)57.8°, (V) 37.8°, (D) 66°	
Image Features	<ul style="list-style-type: none"> • Configurable image size, quality, frame rate, and bit rate • Time stamp and text overlays • Configurable motion detection windows 	<ul style="list-style-type: none"> • Configurable privacy mask zones • Configurable shutter speed, brightness, saturation, contrast, and sharpness
Video Compression	<ul style="list-style-type: none"> • H.264/MPEG-4/MJPEG simultaneous format compression 	<ul style="list-style-type: none"> • H.264/MPEG-4 multicast streaming • JPEG for still images
Video Resolution	<ul style="list-style-type: none"> • 16:9 - 1280 x 800, 1280 x 720, 800 x 450, 640 x 360, 480 x 270, 320 x 176, 176 x 144 up to 30 fps recording⁷ 	<ul style="list-style-type: none"> • 4:3 - 1024 x 768, 800 x 600, 640 x 480, 480 x 360, 320 x 240, 176 x 144 up to 30 fps recording⁷
Audio Support	• G.726	• G.711
External Device Interface	<ul style="list-style-type: none"> • 10/100 BASE-TX Fast Ethernet port • 802.11n wireless⁸ 	<ul style="list-style-type: none"> • DI/DO port • MicroSD/SDHC card slot
Network		
Network Protocols	<ul style="list-style-type: none"> • IPv6 • IPv4 • TCP/IP • UDP • ICMP • DHCP client • NTP client (D-Link) • DNS client • DDNS client (D-Link) • SMTP client • FTP client 	<ul style="list-style-type: none"> • HTTP / HTTPS • Samba client • PPPoE • UPnP port forwarding • RTP / RTSP/ RTCP • IP filtering • QoS • CoS • Multicast • IGMP • ONVIF compliant
Security	<ul style="list-style-type: none"> • Administrator and user group protection • Password authentication 	• HTTP and RTSP digest encryption
System Management		
System Requirements for Web Interface	• Browser: Internet Explorer, Mozilla Firefox, or Google Chrome	
Event Management	<ul style="list-style-type: none"> • Motion detection • Event notification and upload snapshots/video clips via email or FTP 	<ul style="list-style-type: none"> • Supports multiple SMTP and FTP servers • Multiple event notification • Multiple recording methods for easy backup
Remote Management	<ul style="list-style-type: none"> • Configuration accessible via web browser • Take snapshots/video clips and save to local hard drive or NAS via web browser 	
Mobile Support	<ul style="list-style-type: none"> • Windows 7®/Vista®/XP® system, Pocket PC, or mobile phone with 3GPP playback support • mydlink™ mobile apps for iOS and Android mobile devices 	
D-ViewCam™ System Requirements	<ul style="list-style-type: none"> • Operating System: Microsoft Windows 7/Vista/XP • Web Browser: Internet Explorer 7 or higher 	• Protocol: Standard TCP/IP
D-ViewCam™ Software Functions	<ul style="list-style-type: none"> • Remote management/control of up to 32 cameras • Viewing of up to 32 cameras on one screen 	<ul style="list-style-type: none"> • Supports all management functions in web interface • Scheduled motion triggered or manual recording options

DCS-2132L Cloud Camera 2200

General Specifications	
External Power Adapter	• Input: 100 to 240V AC, 50/60Hz • Output: 5V DC, 1.2A
Max. Power Consumption	• 3.65 watts
Operating Temperature	• 32 to 104° F (0° to 40° C)
Storage Temperature	• -4° to 158° F (-20° to 70° C)
Operating Humidity	• 20% to 80% non-condensing
Storage Humidity	• 5% to 95% non-condensing
Certifications	• CE • CE LVD • FCC • C-Tick
Dimensions	• 2.28" x 5.04" x 3.5" (58mm x 127.9mm x 89mm)
Weight	• 0.26lb (116g) ± 5%
Warranty	
Warranty	• 1-Year Limited ⁴
Order Information	
Part Number	Description
DCS-2132L	Cloud Camera 2200

¹Use of audio or video equipment for recording the image of a person without their knowledge and consent is prohibited in certain states or jurisdictions. The end-user assumes all liability for compliance with applicable state, local and federal laws. ²The inclusion of a specific product or manufacturer does not imply its endorsement of D-Link or the D-Link product. ³24/7 Basic Installation Support is available only in the USA for the first 30 days from date of original purchase. ⁴1-Year Limited Warranty available only in the USA and Canada. ⁵Computer must adhere to Microsoft's recommended System Requirements. ⁶Requires mydlink-enabled Cloud Router. ⁷Frame rates when streaming video may vary depending on network conditions and method used. ⁸Maximum wireless signal rate derived from IEEE Standard 802.11 specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range. Wireless range and speed rates are D-Link RELATIVE performance measurements based on the wireless range and speed rates of a standard Wireless G product from D-Link. Maximum throughput based on D-Link's 802.11 n devices.

All references to speed and range, including the performance chart, are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted on the package. See inside package for warranty details.



For more information

U.S.A. | 17595 Mt. Herrmann Street | Fountain Valley, CA 92708 | 800.326.1688 | dlink.com **Canada** | 2525 Meadowvale Blvd | Mississauga, ON L5N 5S2 | 800.361.5265 | dlink.ca

©2012 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link, the D-Link logo, D-Link Green, the D-Link Green logo, ShareCenter, and the D-Link RoHS logo are trademarks or registered trademarks of D-Link Corporation or its subsidiaries in the United States and/or other countries. Other trademarks or registered trademarks are the property of their respective owners.

Updated 8/7/12



D-Link[®]
Building Networks for People